



NARINGIN LOD ON UHPLC

Application note # QAN-0054

PARAMETERS


NQAD
GAS: Air
FILTER: 1.3 sec
GAIN: 200x and 1Kx
Offset: 0 and -50
EVAPORATION TEMP: 35C

HPLC
MOBILE PHASE: 50:50 MeOH:Water with 5 mM HFBA premixed
FLOW RATE: 0.25 mL/min
COLUMN: Vision C18 HT, 1.5 um, 2 x 50 mm
COLUMN TEMP: Ambient
INJECTION VOLUME : 1 µL



QUANT TECHNOLOGIES, LLC
1463 94TH Lane NE
Blaine, MN, USA 55449
763-398-0508
www.Quant-NQAD.com

CHROMATOGRAMS

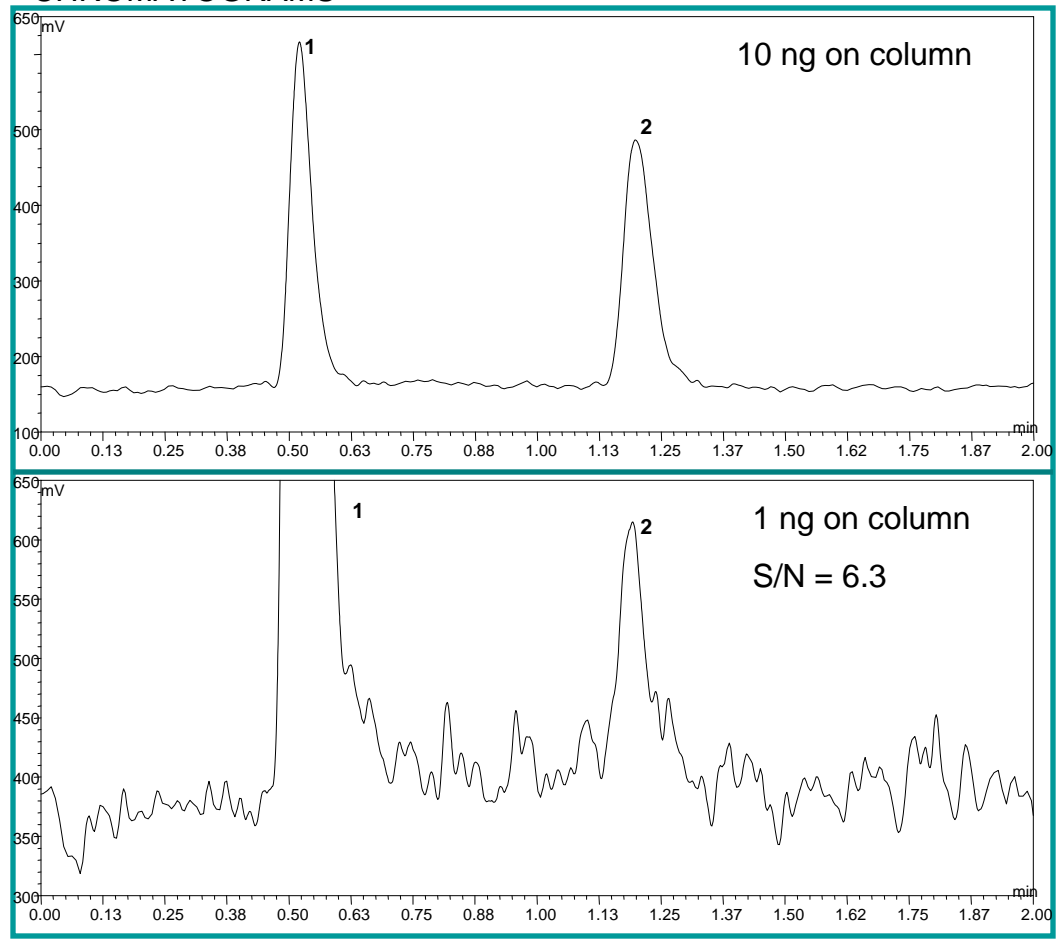

1= Injection Artifact, 2 = Naringin

NQAD™ APPLICATION NOTES