



OBTAIN A MORE COMPLETE PROFILE OF SAMPLE COMPONENTS AND THE FREEDOM TO USE UV-INTERFERING MOBILE PHASES

Application note # QAN-0073

PARAMETERS

NQAD


GAS: Air
FILTER: 1.3 sec
GAIN: 1X
EVAPORATION TEMP: OFF

HPLC

MOBILE PHASE A: 5 mM ammonium acetate
MOBILE PHASE B: 0.05% formic acid in ACN
METHOD: 25:75 A:B

FLOW RATE: 0.5 mL/min
COLUMN: Tosoh amide 80, 2.0 x 150 mm, 5 μ
COLUMN TEMP: Ambient
INJECTION VOLUME: 10 μ L
ANALYTE: Melamine
CONCENTRATION: 100 ng

CHROMATOGRAMS

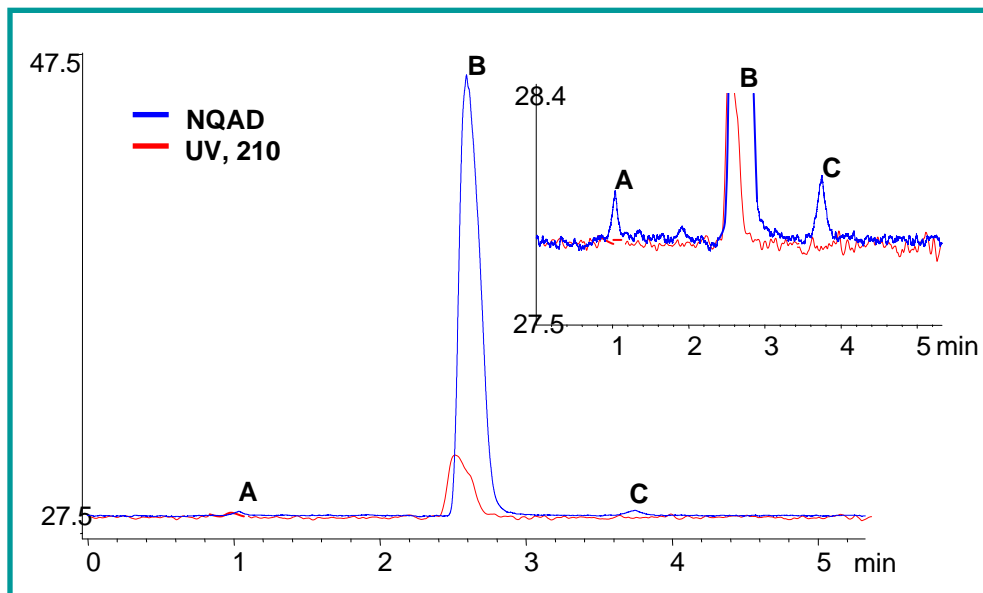

(A) = cyanuric acid, (B) = melamine, (C) = unidentified impurity



QUANT TECHNOLOGIES, LLC

1463 94TH Lane NE
Blaine, MN, USA 55449
763-398-0508
www.Quant-NQAD.com